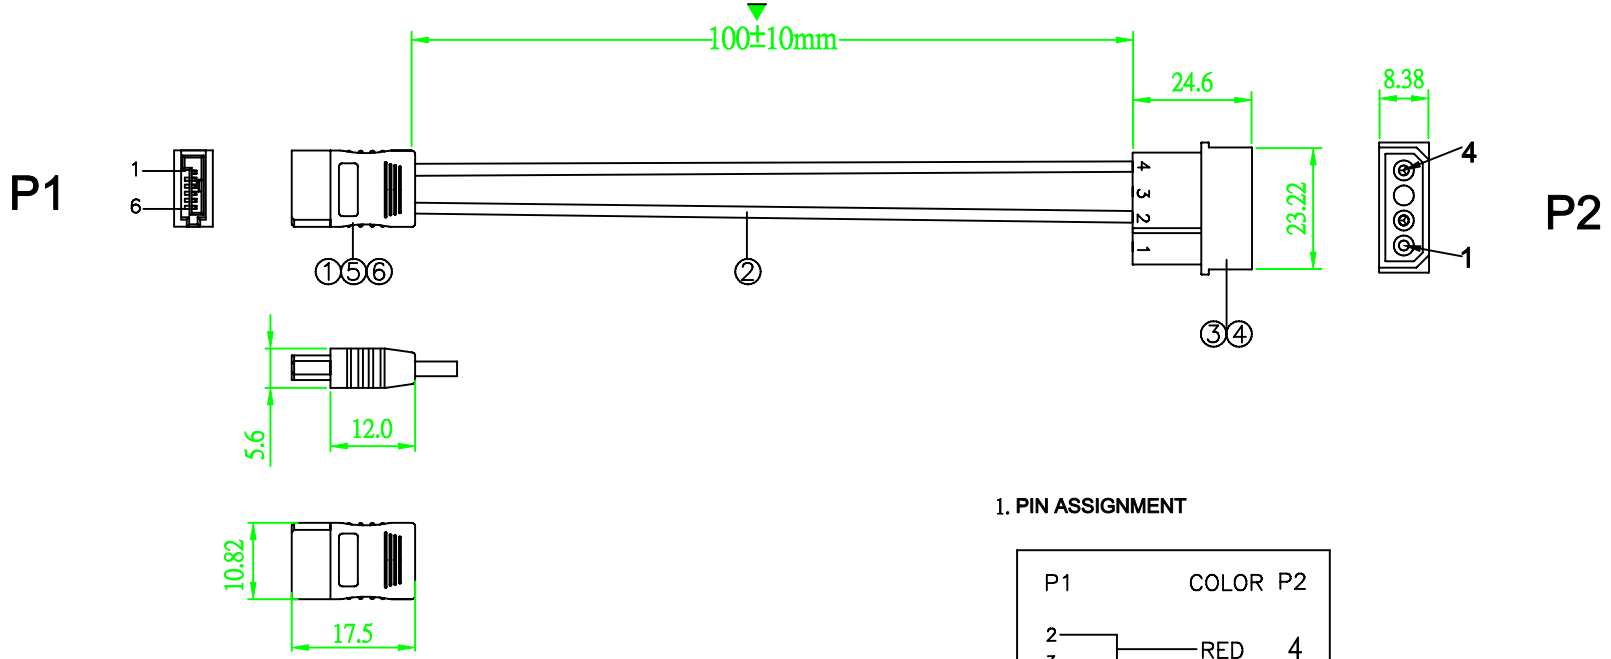


1. **PIN ASSIGNMENT**

P1	COLOR	P2
2, 3	RED	4
5, 6	BLACK	2

2. ELECTRONIC TEST:
   (1). ALL CABLE 100% TEST,OPEN ,SHORT,MISS WIRE.
   (2). RESISTANCE: 3 Ohm MAX.
   (3). I.RESISTANCE:10M Ohm MIN.
   (4). HI-POT: 300V DC/10ms.
   (5). DIMENSIONS MARK"▼"SHOULD BE CHECKED;

NO.	PART NO.	DESCRIPTION	Q'TY	UNIT
⑥	PE	LD PE	AR	KG
⑤	PVC	45P BLACK PVC	AR	KG
④	CONTACT	SM CONTACT Ni FLESH MALE	2	PCS
③	HOUSING	SM POWER-4P FEMALE ,WHITE	1	PCS
②	HOOK UP WIRE	UL1007 20AWG BLACK&RED	1	PCS
①	SATA CONN	SLIMLINE SATA 6P ,BLACK MOLDING G/F	1	PCS

REV	CHECKED BY	DATE	DESCRIPTION
A	Stewart	2008.10.6	NEW DRAWING
B	Stewart	2008.12.22	Update Length
C	Stewart	2009.02.05	Add Overmold
D	Judy	2/19-09'	發行廠內圖.

OTHER	X	.X	.XX
TOLERANCE	/	/	/

DRAWN BY	Stewart	FEB,05,2009'
DESIGNED BY	Vivian	FEB,05,2009'
APPROVED BY	Johnny	FEB,05,2009'

PN: 96CB-SATAPOWER-6P

JI-HAW INDUSTRIAL CO. LTD

SCALE	X	SHEET:	1 OF 1
UNIT	MM		DB4662