

ECU-479

IEC-61850-3 Certified Power Automation Computer Based on 14th Generation Intel® Core™ Processors

NEW



Features

- 13th/14th Gen Intel® Processor with up to 8+12 Cores
- Quad display interfaces for SCADA and more multi-display use cases
- Support for a RAID card, HSR/PRP expansion card, and redundant PSU
- Supports Intel® AMT, iBMC, SNMP for remote management
- Wide operating temperature range, fanless rugged design for harsh environments
- Optional 10-year warranty and long product life cycle for substations

Introduction

The ECU-479 is an IEC 61850-3 and IEEE 1613 certified product that provides high reliability and stability for power automation applications. The ECU-479 boasts a fanless, durable design, high CPU performance, easy maintenance, versatile expansion options, and a wide range of communication interfaces. Additionally, it supports virtualization technology, making it well suited for the digitalization of power substations.


Specifications

13th & 14th Generation Processors	CPU	i7-14700T	i7-14701TE	i7-13700TE
	Processor Base Frequency	1.30 GHz	2.10 GHz	1.10 GHz
	Intel® Smart Cache	33 MB	33 MB	30 MB
	Core Number	20 (8 P-cores, 12 E-cores)	8 P-cores	16 (8 P-cores, 8 E-cores)
	TDP	Limited to 25W		
	Chipset	Intel® R680E chipset		
Memory*	Technology	Dual-channel DDR4		
	Capacity	Up to 64 GB		
	DIMM Slot	2 x DDR4 SODIMM RAM with ECC		
Ethernet	Controller	1 x Intel® I210 + 3 x Intel® I226		
	Speed	10/100/1000 Base-T, 2,500V isolation. Supports iBMC (LAN1), Intel® AMT (LAN2), SNMP remote management		
	Connector	4 x RJ-45		
Storage	2.5" SSD	4 x 2.5" SATA SSDs, up to 9.5mm height		
	M.2 SSD	1 x M.2 2280 M-Key NVMe PCIe Gen. 3 x4 or SATA		
I/O	External USB	3 x USB 3.2 Gen1 (rear), 2 x USB 3.2 Gen1 (front)		
	Internal USB	1 x USB 2.0		
	Serial	2 x RS-232/422/485 (DB9 connectors) 2,500V isolation, 50 - 115200 bps.		
	Display	4 x DP++ 1.2 up to 4K @ 60Hz		
Expansion Interface	Proprietary PCI/PCIe	1		
	PCIe	1 x standard PCIe x16 slot Gen. 4 low profile 3 x standard PCIe x4 slot Gen. 3 low profile		
	Optional Module	RJ45 Port, SFP Port, Isolated Serial Port, Isolated Digital I/O, HSR/PRP, PCIe, Mini-PCIe, PCI-104, IRIG-B		
Software	Operating System	Windows11, Windows10, Windows Server 2022, Linux (Ubuntu 22.04)		
Power**	Input Voltage	2 x hot-swappable redundant power supply, 150W Power1: 100 ~ 240 V _{AC} , 100 ~ 240 V _{DC} (Inside) Power2: 100 ~ 240 V _{AC} , 100 ~ 240 V _{DC} (Option)		
	Environment	Operating Temperature Storage Temperature Relative Humidity	-25 to 70°C (Depends on CPU model and configuration) -40 to 85°C Operating, 95% RH @ 40°C, non-condensing Non-operating, 95% RH @ 60°C, non-condensing	
Mechanical	Dimensions (W x H x D)	483 x 478 x 88 mm (19" x 3.5" x 18.8")		
	Mounting	2U Rackmount		
	Weight	13.0 kg (28.66lbs)		
	Ingress Protection	IP20		
Certification	EMC	CE, FCC, IEEE 1613		
	Safety	CB, UL		
	Type approval	IEC 61850-3		
	Shock Protection	IEC 60068-2-27: 20G half sine, 11 ms with SSD		
	Vibration Protection	IEC 60068-2-64: Random 1 Oct./min, 1hr/axis with SSD		
Other	Trusted Platform Module	TPM 2.0 (Option)		
	Watchdog Timer	Programmable 256 levels time interval, from 1 to 255 seconds for each tier		
	Relay	Relay Output Form C Contact 5A @ 125V _{AC} / 5A @ 30V _{DC} Channel 1		


*To be assembled in the Advantech CTOS center.

Dimensions


Unit: mm

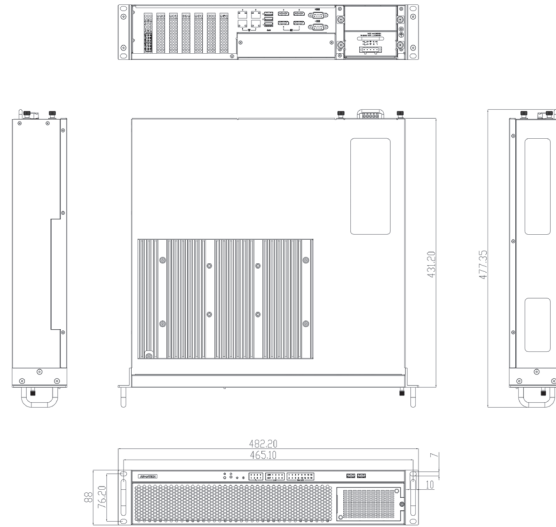

Front View

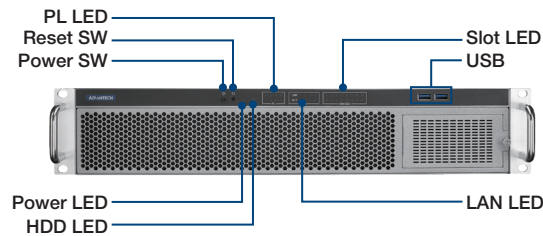

Rear View

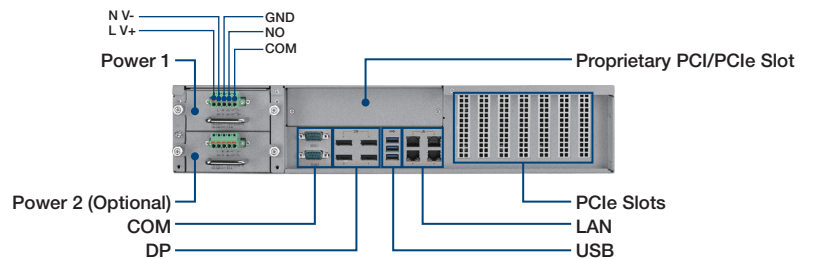

Ordering Information

Part Number	Description	PSU	COO
ECU-479-V1-S1	RPL-S Processors, 1 x PSU (AC/DC), 4 x LAN, 4 x DP, 1 x EP Slot, 4 x PCIe	1	China
ECU-479-V1-S1U	RPL-S Processors, 1 x PSU (AC/DC), 4 x LAN, 4 x DP, 1 x EP Slot, 4 x PCIe	1	Taiwan

OS List

Part Number	Description
20706WXH1S0003	Windows 11 IoT Enterprise 64bit for Intel® Core™ i7 processors
20706WX1HS0127	Windows 10 IoT Enterprise 2021 LTSC 64bit for Intel® Core™ i7 processors
20706WS22S0001	Windows server 64bit 16 core 2022
20706U22DS0043	Ubuntu 64bit 22.04

RAID Set

Part Number	Description
96RC-SAS-4P-PE-AD6	Adaptec 3101E-4i SAS PCIe x8 RAID card. Supports RAID 0,1,10.
96RC-SAS-8P-PE-AD6	Adaptec 2100-8i SAS PCIe x8 RAID card. Supports RAID 0,1,10, 5
ECU-KIT-47904	ECU-479 cable kit for RAID card

Optional List

Part Number	Description
FRU-ECUPWR-100A	PSU module 150W 100-240Vac/dc
96NIC-1G2P-PE-IN3	Intel® NIC 100/1000M dual RJ-45 PCIe x4
PCIE-1131PS-00A1E	Intel® I350 Quad 1G SFP PCIe x4
PCA-TPMSPI-00A1	TPM 2.0 module by SPI for CPU cards
ECU-P1624D-B	4-port Isolated RS-232/422/485 with IRIG B
ECU-P1628D-B	8 x Isolated RS-232/422/485 w/ ECUP slot
ECU-P1524PE-GAE	2 x SFP Gigabit HSR/PRP Card w/ ECUP slot
ECU-P1528RE-B	8-Port RJ45 Gigabit Base Ethernet Card w/ ECUP slot
ECU-P1528PE-B	8-Port SFP Gigabit Base Ethernet Card w/ ECUP slot
ECU-P1522LPE-A	2-Port SFP Ethernet with HSR/PRP Low Profile PCIe
UNOP-1000K-AE	PCIe Expansion Card w/ ECUP slot