

EPC-P30X6

2U system with 8th/9th Gen Intel® Core™ i CPU (LGA 1151)



Features

- Supports Intel® 8th/ 9th Gen Core™ i processor (LGA1151) with Intel C246/ H310 chipset
- Up to 4 x Extension Card by Riser Card
- 3 x GigaLAN and 8 x USB3.0
- 2 x RS-232/422/485 and 4 x RS232 serial ports, 16 bit GPIO
- 4 x SATA, 1 x M.2 E key, 1 x M.2 B/M key, 2 x F/S mSATA
- VGA+HDMI or 2 x HDMI output
- Supports wide-range DC power input
- Support Advantech I Door module



Specifications

Model Name	EPC-P3000			
Order Number	EPC-P3066EA-00Y2E	EPC-P3066SA-00Y2E	EPC-P3086SA-CNY2E	
Cooling	SYS Fan / CPU Fan 2 / 1			
System Spec	CPU	XEON E-2176G	i5-8500	N/A
	Core Number	6	6	
	Max Speed	3.7 GHz	3.0 GHz	
	TDP	80W	65W	
	Chipset	C246	C246	H310
Memory	Two 260-pin SO-DIMM up to 64GB DDR4 2400/2666 MHz SDRAM			
Ethernet	Controller	LAN1: Intel I219LM (GbE) LAN2: Intel i210AT (GbE) LAN3: RTL8119I-CG (GbE)		
Audio	Chipset	Realtek ALC888S, High Definition Audio(HD)		
Storage	2.5" HDD/SSD	2 x 2.5" HDD/SSD (Default)		
	mSATA	2	2	1
	M.2 B key	1	1	-
Storage in extension card Area (share w/ PCIe & PCI cards)	2.5" HDD/SSD (optional)	2 x 2.5" HDD		
	3.5" HDD (optional)	2 x 3.5" HDD		
Front IO	VGA	1	1	1
	HDMI	1	1	1
	Ethernet	3	3	2
	USB 3.1/3.0/2.0	2/4/0	2/4/0	0/4/2
	Serial Port	6 ports; 2 x RS232/422/485 (BIOS select) + 4 x RS232		
	Power SW / LED	1		
	Remote Control	6-pin connector (2.0 Pitch) by HSG A2004H030 (Power SW+/SW- + LED+/- + RST +/-)		
	GPIO (16 bits)	2 x D-sub 9-pin		
	i Door window	1	1	1
	Expansion slot	Up to 4 x extended Card by Riser Card		
LED indicator	5 (COM1 TX/RX, COM2 TX/RX, HDD LED)			
Power input	Wide-range DC input with terminal block 4-Pin			
Internal I/O	HDMI (max 1080P)	2 (pin header, with external IO up to 3 Displays)	2 (pin header, with external IO up to 3 Displays)	-
	Audio	MIC in, Line out (pin header)		
	USB 2.0	4 (pin header)	4 (pin header)	2 (pin header)
	SATA III	3	3	2
Internal expansion Slot	M.2 B Key	1 (support 2280 & 3042), support SIM card holder, Optional	1 (support 2280 & 3042), support SIM card holder, Optional	-
	M.2 E key	1 (support 2230)	1 (support 2230)	-
	Mini-PCIe	2 Full size (with USB2.0/PCIe/mSATA) for EPC-P3066		
Environment	Operating Temperature	0 ~ 40 °C		
	Non-operating Temperature	-20 ~ 60 °C (-4 ~ 140 °F)		
	Humidity	10 ~ 95% @ 40 °C, non-condensing		
	Vibration (5 ~ 500 Hz)	0.5 Grms (2 x 2.5" HDD; PCIe Card inserted)		
	Shock	10G (with 11ms duration, half sine wave)		
Physical Characteristics	Certification	CE/FCC/CB/UL/CCC	CE/FCC/CB/UL/CCC	CE/FCC/CB/UL/CCC
	Dimensions (W x D x H)	335 x 260 x 88 mm		
	Weight	6.54 kg		


* Other CPU will be project base (TPN)

* Extra HDD/SSD will occupied PCIe or PCI slot space

Front Side




Rear Side



Dimensions

Unit: mm

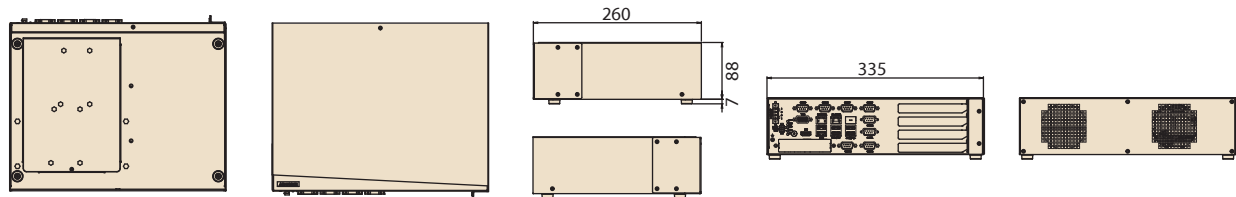

Ordering Information

PN	CPU	Chipset	V G A / HDMI	COM	Front IO		Internal IO ¹										Power input	Riser Card		
					USB3.1/USB3.0/USB2.0	G b E LAN	GPIO	HDMI	SATA III	USB	Audio	M . 2 B/M-key	M . 2 E-key	mini-PCIe	TPM	Power input		PN	Slot	SATA/SATA PWR
EPC-P3066EA-00Y2E	E-2176G	C246	1/1	6	2/4/0	3	16-bit	2 ³	3	4	2	1	1	2 (F/S)	(1)	DC 12-24V	EPC-RF484-13A1E	1 PCIe8 + 3 PCIe4	1/1	
EPC-P30665A-00Y2E	I5-8500	C246	1/1	6	2/4/0	3	16-bit	2 ³	3	4	2	1	1	2 (F/S)	(1)		EPC-RF48P-22A1E	2 PCIe8 + 2 PCI	1/1	
EPC-P3086SA-CNY2E	N/A	H310	1/1	6	0/4/2	3	16-bit	2 ³	3	2	2	1	1	2 (F/S)	(1)		EPC-RF2F4-11A1E	1 PCIe16 + 1 PCIe4	1/1	
																	EPC-RF4F1-13A1E ⁵	1 PCIe16 + 3 PCIe1	1/1	
																	EPC-RF484-13A1E	1 PCIe8 + 3 PCIe4	1/1	
EPC-RF48P-22A1E	2 PCIe8 + 2 PCI	1/1																		
EPC-RF2F4-11A1E	1 PCIe16 + 1 PCIe4	1/1																		
EPC-RF4F1-13A1E ⁵	1 PCIe16 + 3 PCIe1	1/1																		
EPC-RF484-13A1E	1 PCIe8 + 3 PCIe4	1/1																		
EPC-RF48P-22A1E	2 PCIe8 + 2 PCI	1/1																		
EPC-RF2F4-11A1E	1 PCIe16 + 1 PCIe4	1/1																		
EPC-RF4F1-13A1E ⁵	1 PCIe16 + 3 PCIe1	1/1																		

- All internal IO need Optional Cable or bracket.
- M.2 B/M-key support SIM card holder.
- Internal HDMI 1 and VGA port are either one
- mini-PCIe: for H310 sku, one with USB2.0/mSATA, other with USB2.0/PCIe.
- EPC-RF4F1-13A1E need custom BIOS. Supported by projects (TPN)

Power Adapter Options

Part Number	Watts	Input	Output	Safety
96PSA-A230W24P4-3	230W	AC 100 ~ 240 V	24V, 9.58A	CE/FCC/CCC/UL/CB/TUV/KCC/BSMI
96PSA-A150W19P4-4	150 W	AC 100 ~ 240 V	19V, 7.89A	CE/FCC/CCC/UL/CB/TUV/KCC/BSMI

- * 150W power adapter supports EPC-P30X6 Without riser card options.
 ** Please consider the overall power consumption and carefully select the power supply that is right for you.

Packing List

Item	Quantity
SATA Data cable	2
SATA power cable	1
Terminal block conn. (male)	1
Manual	1
HDD screws	8

Optional Accessories

Items	Part Number	Description
Cable	1700000596-11	Power cable 3-pin 183cm, China type
	1702031801	Power cable 3-pin 183cm, UK type
	1702002600	Power cable 3-pin 183cm, USA type
	1702002605	Power cable 3-pin 183cm, Europe type
	1700000237-01	Power cable 3-pin 183cm, Japan type
iDoor*	EPC-DORP-HDM00	Dual HDMI cables and BKT
	EPC-DORP-USB00	Dual USB2.0 cable and BKT
Bracket	AIMB-0BRK-WM02E	Wall Mount Bracket
	EPC-BRKP-RM010	Rack Mount Bracket
	EPC-BRKP-H3510	Dual 3.5" HDD mounting kit
	EPC-BRKP-H2510	Dual 2.5" HDD mounting kit
OS	20706WX9ES0041	img W10 19EL 64b 1809 ENU
	20706WX9HS0028	img W10 19HL 64b 1809 ENU
	20706WX9VS0031	img W10 19VL 64b 1809 ENU

* iDoor module and secondary 2.5" HDD are either one

Optional Accessories (extended Card)

Function	Part Number	PCIe	Description
LAN Card	96NIC-1G-PE-IN	x1	INTEL NIC 10/100/1000M PCIe1 DESKTOP(G) RJ45
Dual LAN	96NIC-1G2P-PE-IN3	x4	INTEL NIC 10/100/1000M PCIex4 2PORT SER RJ45
RAID	96RC-SAS-4P-PE-AD4	x8	ADAPTEC 8405E SAS 4P 12GB/S 512M PCIeX8
Frame Grabber	PCIE-1674E-AE	x4	4-Port PCIe GigE Vision Frame Grabber w/ PoE
Frame Grabber	PCIE-1154-AE	x4	4-port PCIe USB Vision Frame Grabber
Serial Ports	PCIE-1622B-BE	x1	8-port RS-232/422/485 PCIe w/ surge
CAN BUS	PCIE-1680-AE	x1	2-Port CAN-Bus PCIe card w/ Isolation
DIDO	PCIE-1751-AE	x1	48-ch digital I/O and 3-ch counter PCIe card
Motion Card	PCI-1245L-AE	PCI	4-axis Stepping and Servo Motor Control Universal