


MIC-3850 Series

Industrial L2 Full Gigabit Modular Switch Card with 4 x 10G Base-T managed Ethernet

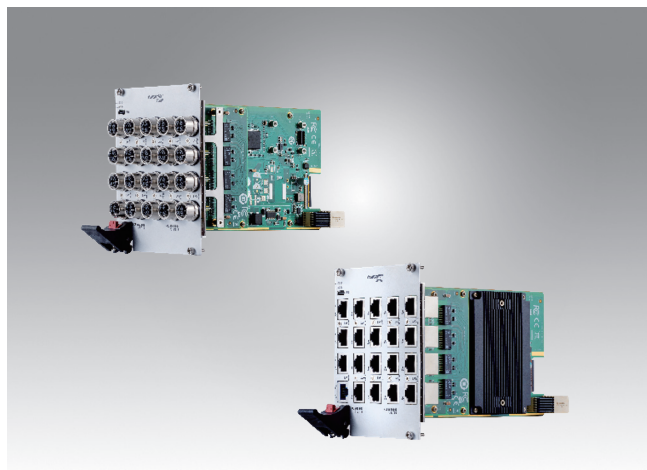

Features

- 3U Height CompactPCI Serial form factor
- Up to 22 Gigabit ports and 4 10G Base-T ports
- Redundancy: X-Ring Pro, X-Chain
- DHCP option 82 for flexible host configuration
- Security: 802.1X (port-based, MD5/PEAP encryption), RADIUS
- Management: SNMP v1/v2c/v3, WEB, Telnet, standard MIB, private MIB
- Wide operating temperature range of -40~70°C
- Designed to meet EN50121-4 and EN50155
- PICMG CompactPCI Serial(CPCI-S.0 R2.0) compliant

Introduction

The MIC-3850 is a 3U managed Ethernet Switch card following the CompactPCI Serial form factor. It offers up to 22 Gigabit and 4 10G Base-T ports, with 19 Gigabit and 1 10G port on RJ-45/X-code M12 front connectors. The remaining 3 Gigabit and 3 10G ports are for backplane communication via the CompactPCI Serial P6 connector.

The CompactPCI® Serial backplane connector P1 provides the +12V power supply. Additionally, one console port in RS232 mode connects to a USB Type-C front panel connector for debugging purposes.

The MIC-3850, on a suitable CompactPCI® Serial backplane, can cascade into a switch fabric with scalable GbE and 10G ports, with or without a CPU card. It also includes a reserved pin header to support a Wi-Fi Dual-Band Access Point Embedded Module. When combined with a CompactPCI® Serial CPU or GPU board, it forms a high-performance router system.

The MIC-3850 is designed to meet EN50155 and EN50121-4, delivering robust mechanical, EMC, safety, and environmental performance. It is especially suited for harsh environments such as railways.

Specifications

Interface	<ul style="list-style-type: none"> ▪ Ethernet Port: Total up to 22 x GbE ports and 4 x 10G ports are in use on-board <ul style="list-style-type: none"> – Up to 19 x GbE ports and 1x 10G port connected to front panel connectors, M12 or RJ-45 interface available – Another 3 x GbE ports and 3 x 10G ports are available to backplane via CompactPCI serial con. P6 – The number of GbE ports and 10G Base-T ports are scalable ▪ Console Port: USB type C (UART) ▪ Power Connection: The CompactPCI® Serial backplane connector P1
Front Panel	<ul style="list-style-type: none"> ▪ Up to 19 x GbE ports and 1x 10G port connected to front panel connectors, M12 or RJ-45 interface available ▪ The number of GbE ports and 10G Base-T ports are scalable ▪ 1 x USB Type C port for console
LED Display	<ul style="list-style-type: none"> ▪ System LEDs: PWR indicates Power LED, green is power on, yellow on is power off. ▪ Port LEDs: LAN link/activity LEDs: <ul style="list-style-type: none"> – LAN Link: <ul style="list-style-type: none"> GbE LAN LED: 100M speed: yellow; 1000M speed: green; others: off 10GbE LAN LED: 1000M speed: yellow; 10G speed: green; others: off – LAN Activity: green blinking ▪ PoE LEDs on XTM board: <ul style="list-style-type: none"> – PoE on: green – PoE off: off
Switch Properties	<ul style="list-style-type: none"> ▪ DRAM: 1024MB ▪ Flash: 64MB ▪ Max. IGMP group: 1024 ▪ Max static VLANs: 256 ▪ VLAN ID range: 1-4094 ▪ MAC table: 16K ▪ Jumbo frame: 12KB ▪ Packet buffer: 12Mbits ▪ Max priority queues: 8
L2 Features	<ul style="list-style-type: none"> ▪ Link aggregate: static trunk, 802.3ad LACP ▪ VLAN: IEEE 802.1Q tag-based, 802.1ad VLAN stacking, GVRP, GMRP, private VLAN ▪ Port mirroring: per port, multi-source port ▪ IP multicast: IGMP snooping v1/v2/v3, MLD snooping ▪ Redundancy: IEEE 802.1D-STP, IEEE 802.1s-MSTP, IEEE 802.1w-RSTP

Specifications (Cont.)


QoS	<ul style="list-style-type: none"> Priority queue: scheduling WRR (weighted round robin), SP (strict priority) Class of service: IEEE 802.1p based CoS, IP TOS, DSCP, port priority Rate limit: ingress/egress rate limit 		
Security	<ul style="list-style-type: none"> Loop detection: port-based detection/prevention Storm control: broadcast, unknown multicast, unknown unicast Port security: static MAC, MAC violation notice Authentication: 802.1x (port-based), 802.1x (MAC-based), RADIUS, TACACS+ Account manager: multiple account IP security: IP source guard, DHCP snooping, ARP spoofing ACL: L2, L3 access control list, permit/deny/redirect 		
Management	<ul style="list-style-type: none"> DHCP: client, server Config & access: IPv4/IPv6, SNMP v1/v2/v3, WEB GUI, Telnet, RMON, SSH 2.0, SSL(TLSv1) Standard MIB, private MIB Upgrade/backup: TFTP, HTTP, SFTP; firmware dual image Others: SNTP/NTP client, DNS client, syslog 		
On-Board Features	<ul style="list-style-type: none"> Reserve PoE function on XTM-board by request, support IEEE 802.3 af/at mode Reserve WIFI function on XTM I/O board by request 		
Power Consumption	<ul style="list-style-type: none"> MIC-3850-B1S1: 15W MIC-3850-B3D1/MIC-3850-A3D1: 18W 		
Dimension	<ul style="list-style-type: none"> Up to 3U/20HP, 100x160mm Weight: MIC-3850-B1S1, 380g MIC-3850-B3D1/MIC-3850-A3D1, 650g 		
Switch Standards	<ul style="list-style-type: none"> IEEE 802.3 for 10BaseT IEEE 802.3u for 100BaseT(X) IEEE 802.3ab for 1000BaseT(X) IEEE 802.3an for 10GBaseT(X) IEEE 802.3x for flow control IEEE 802.1D-2004 for spanning tree protocol IEEE 802.1w for rapid spanning tree protocol IEEE 802.1s for multiple spanning tree protocol IEEE 802.1p for class of service IEEE 802.1Q for VLAN tagging IEEE 802.1X for authentication IEEE 802.3ad for port trunk with LACP 		
Environment	Operating	Non-Operating	
	Temperature	-40~70°C (-40 ~ 158°F) supported based on standard 3U chassis with forced airflow	-40 ~ 85°C (-40 ~ 176°F)
	Humidity	95% @ 40°C, non-condensing	95% @ 60°C, non-condensing
	Vibration	2G rms	

Ordering Information


Part Number	Width	Ports	GbE Ports		10 GbE Ports	
			Front Panel	To Rear Backplane P6	Front Panel	To Rear Backplane P6
MIC-3850-B1S1	4HP	M12	3	3	1	3
MIC-3850-B3D1	8HP	M12	7	3	0	0
MIC-3850-A3D1	8HP	RJ45	7	3	0	0

Product Pictures

MIC-3850-B1S1

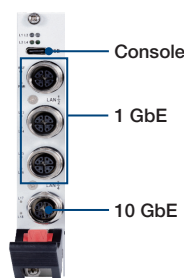

MIC-3850-B3D1

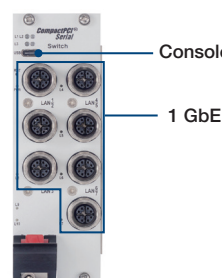

MIC-3850-A3D1



On Request

