

NMC-0808

4 Ports 1GbE Copper (RJ45) + 4 Ports 1GbE Fiber (SFP) 网络扩展模块 可选配支持Bypass功能




特性


- 2x Intel i350-AM4
- 4 Ports 1GbE Copper + 4 Ports 1GbE SFP
- 1 x 第二代PCIe x4,
- 支持2组LAN Bypass 功能(可选)
- 通过无铅认证



规格


控制器	2 x Intel i350-AM4
接口	1 x PCIe x4, Gen2
数据速率	1GbE
端口	4 Ports 1GbE Copper(RJ45) Connectors + 4 Ports 1GbE Fiber(SFP) Connectors
LAN Bypass	2 pairs Advanced LAN Bypass (optional)
LAN LED definition	<div style="display: flex; align-items: center;"> <div style="flex: 1;"> <p>Port1/2/3/4 Indicator: 10Mbps: LED off 100Mbps: LED on (Amber) 1000Mbps: LED on (Green) Link: LED on Act: Blinking LAN Bypass: Amber on</p> </div>  </div> <div style="display: flex; align-items: center;"> <div style="flex: 1;"> <p>Port5/6/7/8 Indicator: Link: LED on Act: Blinking</p> </div> </div>
应用软件特性	合作支持： IEEE 802.3ad IEEE 802.1Q VLANs IEEE 802.3 2005 flow control support Interrupt moderation
支持OS	Windows® Server 2012 R2, 2012, 2008 R2 X86-64 Linux RedHat EL 6.5 and 7.0 IA-32, X86-64, and IA-64 Linux SuSE SLES 11 SP3 and 12 IA-32, X86-64, and IA-64 FreeBSD 9 and 10 IA-32, X86-64, and IA-64 EFI 2.1 and 2.3 X86-64 and IA-64 VMware ESXi5.1, ESXi5.5 and ESXi6.0 X86-64
工作温度	Operation: 0 ~ 45 °C Storage: -20 ~ 60 °C
电源电压 & 功耗	+12V ±10% 15W
尺寸 (W x H x D)	74.5 x 42.5 x 174.7 mm
认证	CE/FCC

前面板布局图

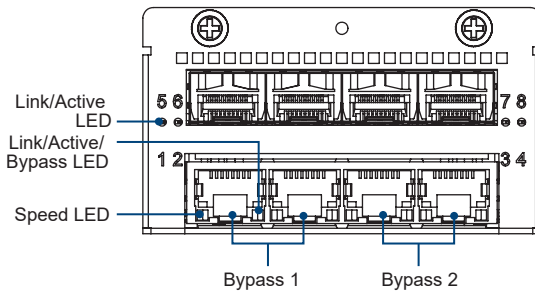

LAN端口2~4 LED的定义与LAN端口1相同
LAN端口6~8 LED的定义与LAN端口5相同。

尺寸

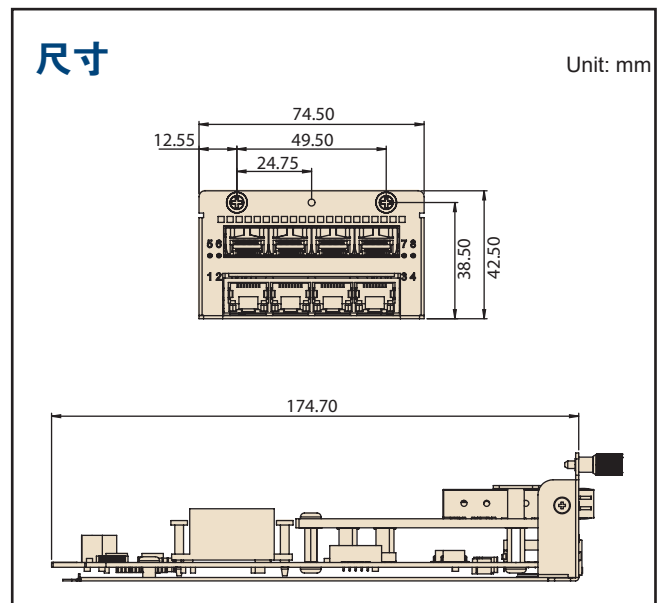

订购信息

料号	类型	说明
NMC-0808-08CFSB1	Thumbscrew	4 Ports 1GbE Copper + 4 Ports 1GbE SFP